

# HF300 High Frequency X Ray Machine With wired DR Combo


**X** Ray India

**COMBO  
OFFER!**



**AERB APPROVED**




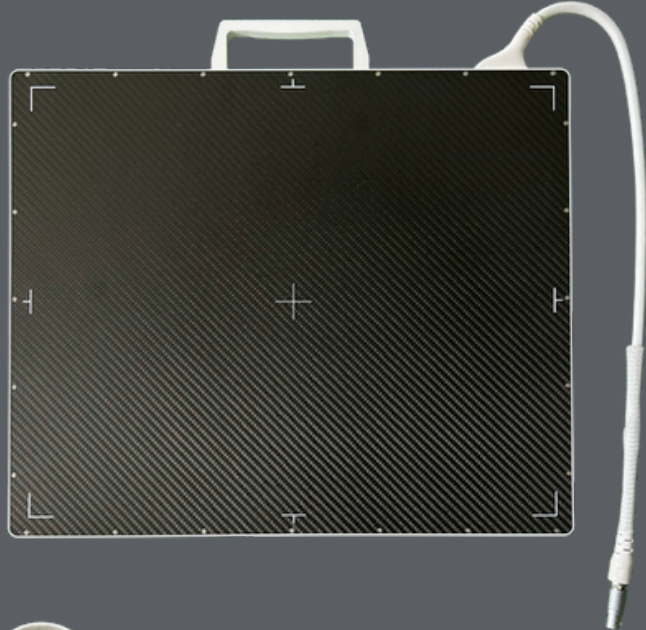

## Wired DR SYSTEM

### BRIEF DESCRIPTION

Pixel Pitch	140 $\mu$ m
Pixel Matrix	2500 x 3052
ADC	16-bit
Gain Stage	Multi-Gain
Scintillator	GOS/CSI
Water Proof	IPX0
Interface	Quick self-locking connector
Calibration	Software, Firmware
Radiation Hardness	$\geq 10000$ Gy

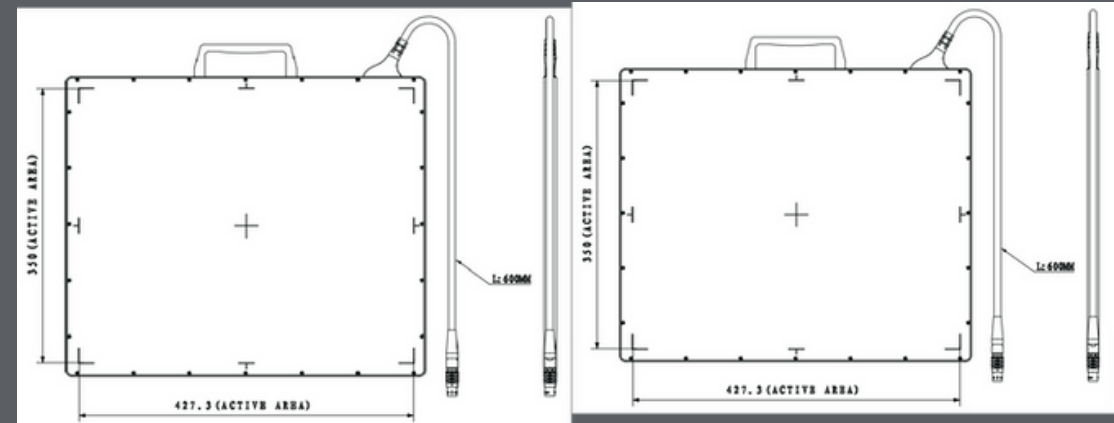

**Convettore**



**Controller**



**Generator**

**Tubehead**





## Laptop

### TECHNICAL SPECIFICATION

Processor Intel(R) Core (TM) i5-6300 CPU  
Installed RAM 8GB  
System Type 64-bit operating system Pen  
and Touch No Pen and touch




## Printer

### TECHNICAL SPECIFICATION

Ink Type Inkjet  
Colour Output Colour  
Connectivity USB  
Print Speed (Monochrome) 7 ppm  
(mono) Print Speed (Colour) 7 ppm  
(colour)




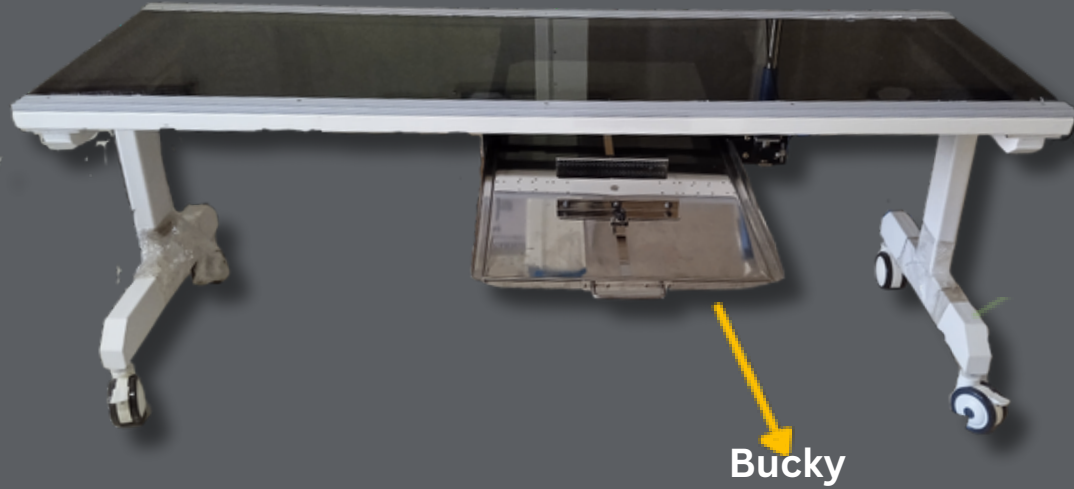

**TECHNICAL SPECIFICATION**



- 1. Table Dimension: "76 x29.5"inch
- 2. Table Load:200kg
- 3. Table Surface:Polycarbonate



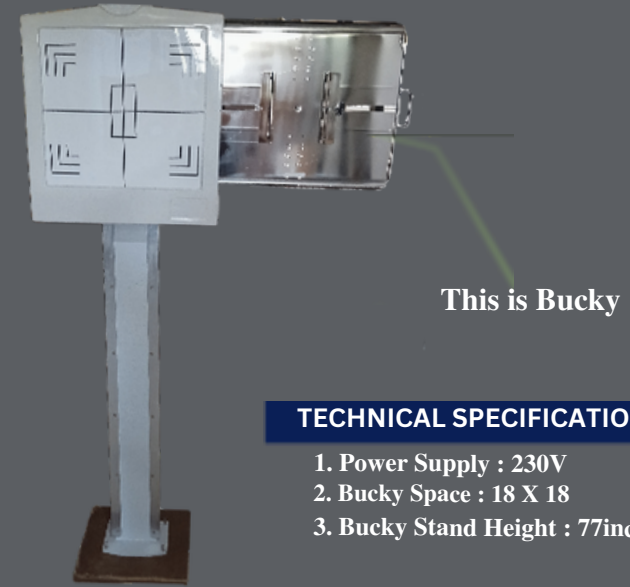

**TECHNICAL SPECIFICATION**

- 1. Power Supply : 230V
- 2. Bucky Space : 18 X 18
- 3. Bucky Stand Height : 77inch

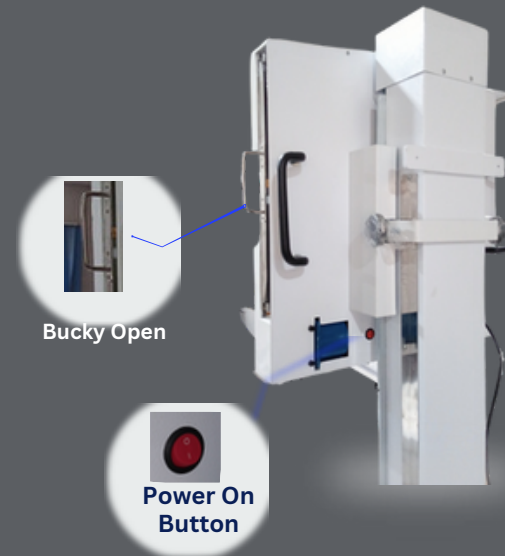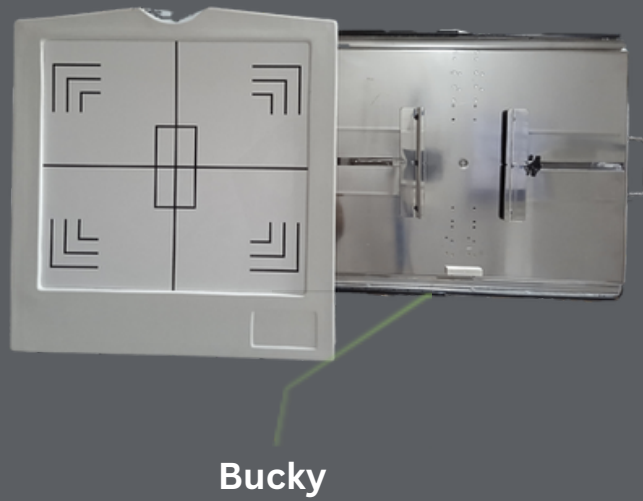



# Technical Specification



1. Maximum Output Power	20 kW
2. Inverter Frequency	40 kHz
3. Monoblock's kV Range	40 kV to 125 kV
4. Maximum mA	320 mA
5. mAs Range :	1 – 320

